


formoza

8026.01 - 8026.12

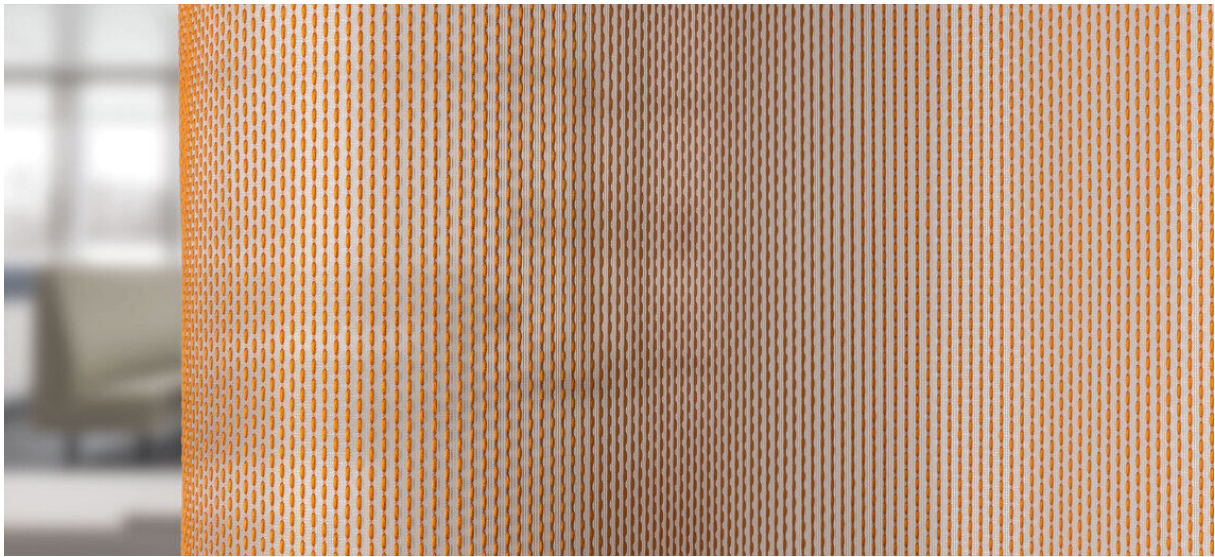

binder
curtain
sheer/transparent

descrizione
voilè acustico arricchito da un'impuntura
verticale

composizione
42% recycled polyester FR / 58% polyester
FR

altezza
± 295 cm, ± 116 inches

peso
± 392 gr/m¹, ± 13 oz/yd¹ fabrics

assorbimento del suono
ISO 354

alphaw 0.80 (pleated)

ASTM C423

nrc 0.75

comfort visivo & termico
EN 410/EN 14501

resistenza al fuoco
EN 13773, class 1
BS 5867 - 2, type C
NF P 92 / 503 - 507, M1
DIN 4102, B1
UNI VF 8456 - 8457, classe 1
NFPA 701
IMO 2010 FTP part 7
CAN ULC S109

solidità allo sfregamento

ISO 105 X12

bagnato 4-5 / asciutto 4-5 (scala 1-5)

AATCC 8

bagnato 5 / asciutto 5 (scala 1-5)

resistenza alla luce

ISO 105 B02

5 (scala 1-8)

AATCC 16.3: 60 hours

5 (scala 1-5)

resistenza al taglio cucitura

ISO 13936 - 2

catena 2.5 mm / trama 2 mm

manutenzione



restringimento: catena -0.2% / trama -0.1%



restringimento: catena -0.7% / trama -0.9%



STANDARD
100
S07-0023
Hohenstein HTTI




Universität Wien
Institut für Textil- und
Kunststoffwissenschaften
Technische Universität Wien

formoza


8026.01 - 8026.12




8026.01



8026.02




8026.03



8026.04



8026.05



8026.06



8026.07



8026.08



8026.09



8026.10



8026.11



8026.12