


naltar

8083.01 - 8083.16

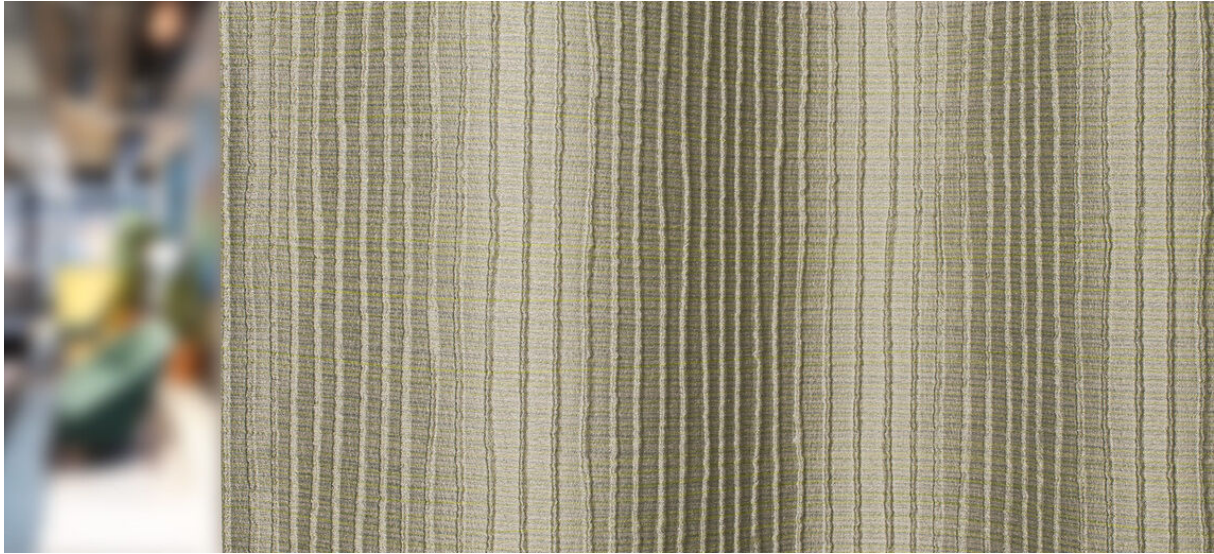

binder
curtain

description
double weave with a vertical organic 3D rib structure in tonal shades

composition
100% flame retardant polyester

width
± 57 inches, ± 144 cm

weight
± 9 oz/yd¹, ± 273 gr/m¹ fabrics

sound absorption
ISO 354
alphaw 0.50 (pleated)

visual & thermal comfort
EN 410/EN 14501

flame retardancy
EN 13773, class 1
BS 5867-2, type C
NF P 92/503-507, M1
DIN 4102, B1
UNI VF 8456-8457, classe 1
IMO 2010 FTP part 7
NFPA 701
CAN/ULC S109

colorfastness to crocking
ISO 105-X12
wet 4-5 / dry 4-5 (scale 1-5)
AATCC 8
wet 5 / dry 5 (scale 1-5)

colorfastness to light

ISO 105-B02
6 (scale 1-8)
AATCC 16.3: 60 hours
5 (scale 1-5)

seam slippage
ISO 13936-2
warp 2.5 mm / weft 2.7 mm
ASTM D434
warp 29 lbs / weft 29 lbs

care



shrinkage: warp: -1.4% / weft: +1.5%




STANDARD
100
S07-0023
Hohenstein HTTI




naltar


8083.01 - 8083.16



8083.01



8083.02



8083.03




8083.04



8083.05



8083.06



8083.07




8083.08




8083.09




8083.10




8083.11



8083.12



8083.13



8083.14



8083.15



8083.16