


harding

7070.01 – 7070.08

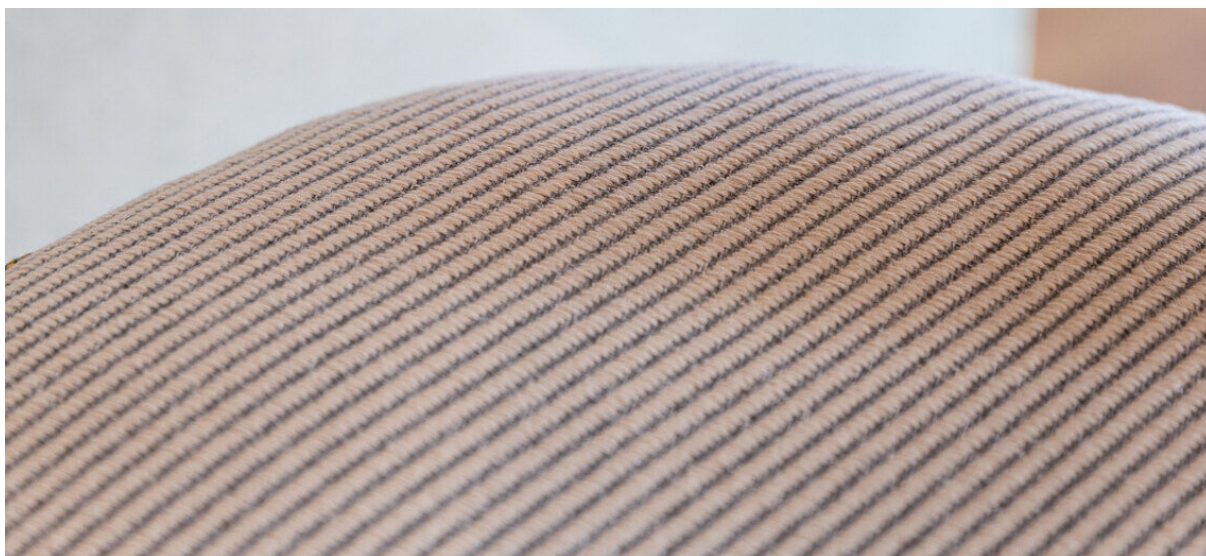

binder

upholstery

descripción

tela para tapicería bitonal fabricada con residuos de plástico 100% reciclado

composición

100% recycled polyester FR

ancho

± 151 cm, ± 59 inches

peso

± 660 gr/m¹, ± 21 oz/yd¹ fabrics

combustión retardada

EN 1021/ 1-2

BS 5852, crib 5

NF D 60-013 (AM 18)

DIN 4102, B1

UNI 9175, classe 1.IM

Cal TB 117

NFPA 260, class 1

IMO 2010 FTP part 8

resistencia al desgaste

ISO 12947-2

130.000 rubs martindale

ASTM D4157

100.000 double rubs wyzenbeek

pilling

ISO 12945-2

4-5 (escala 1-5)

resistencia al frotamiento

ISO 105-X12

mojado 4-5 / seco 4-5 (escala 1-5)

insensibilidad a la luz

ISO 105-B02

6 (escala 1-8)

resistencia al deslizamiento de costuras

ISO 13936-2

lizo 3 mm / trama 2 mm

resistencia a la tensión

ISO 13934-1

lizo 1220 N / trama >2500 N

mantenimiento



carencia: lizo -2% / trama -2%




STANDARD
100


S21-3365
Hohenstein HTTI

harding


7070.01 – 7070.08




7070.01




7070.02



7070.03




7070.04




7070.05



7070.06



7070.07



7070.08